

Find the two Service Hot Conductors.

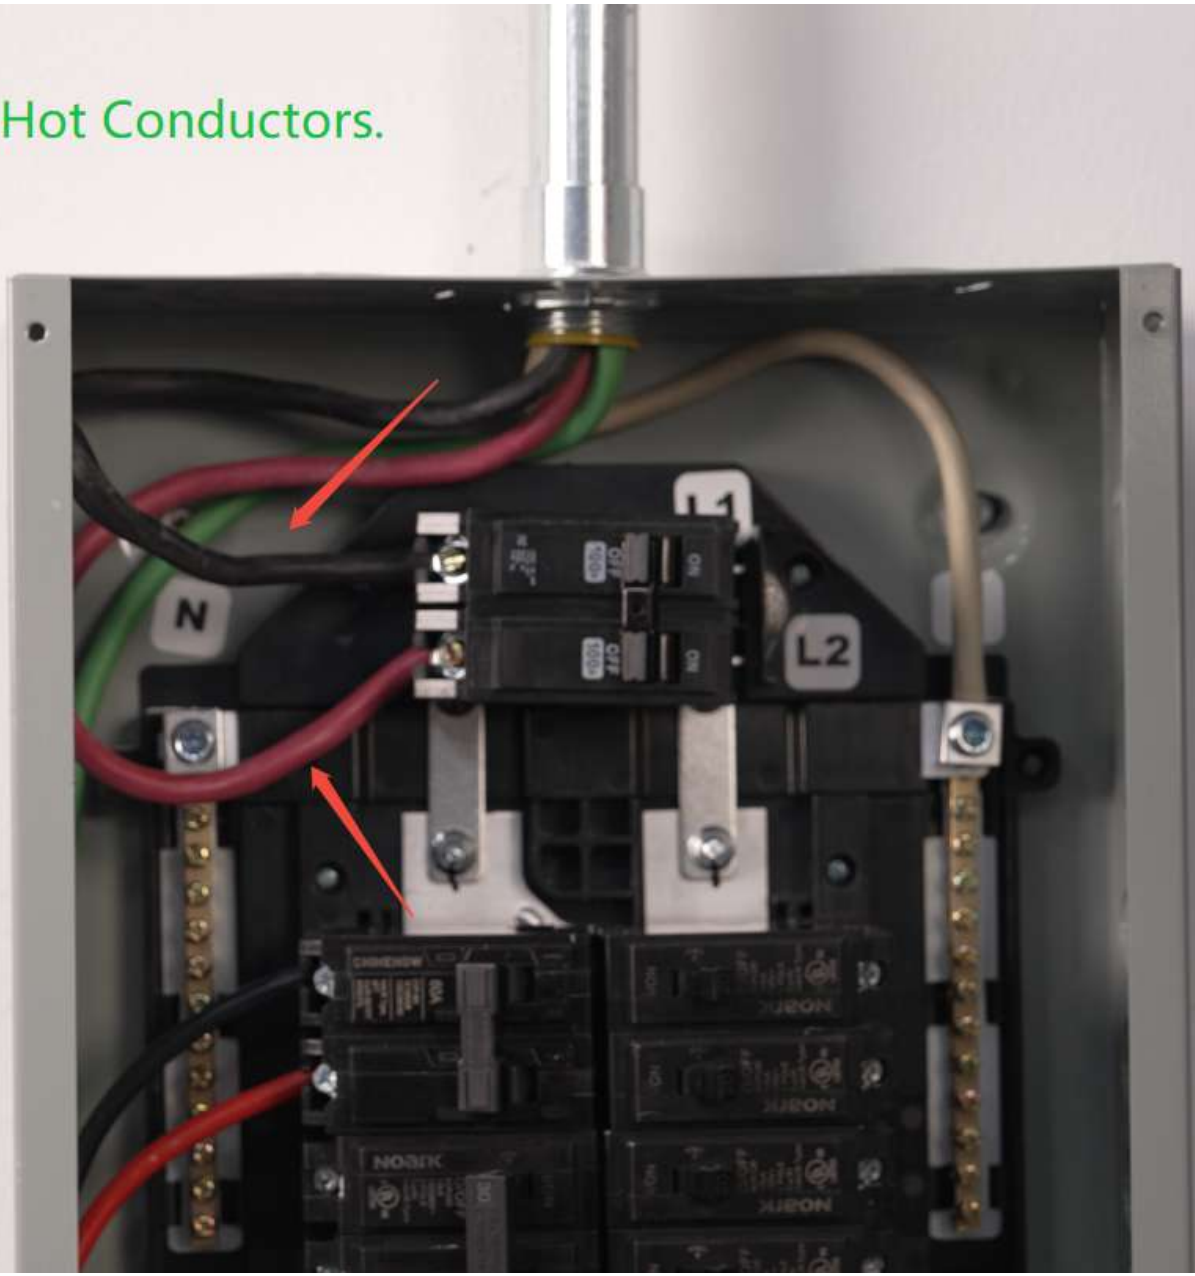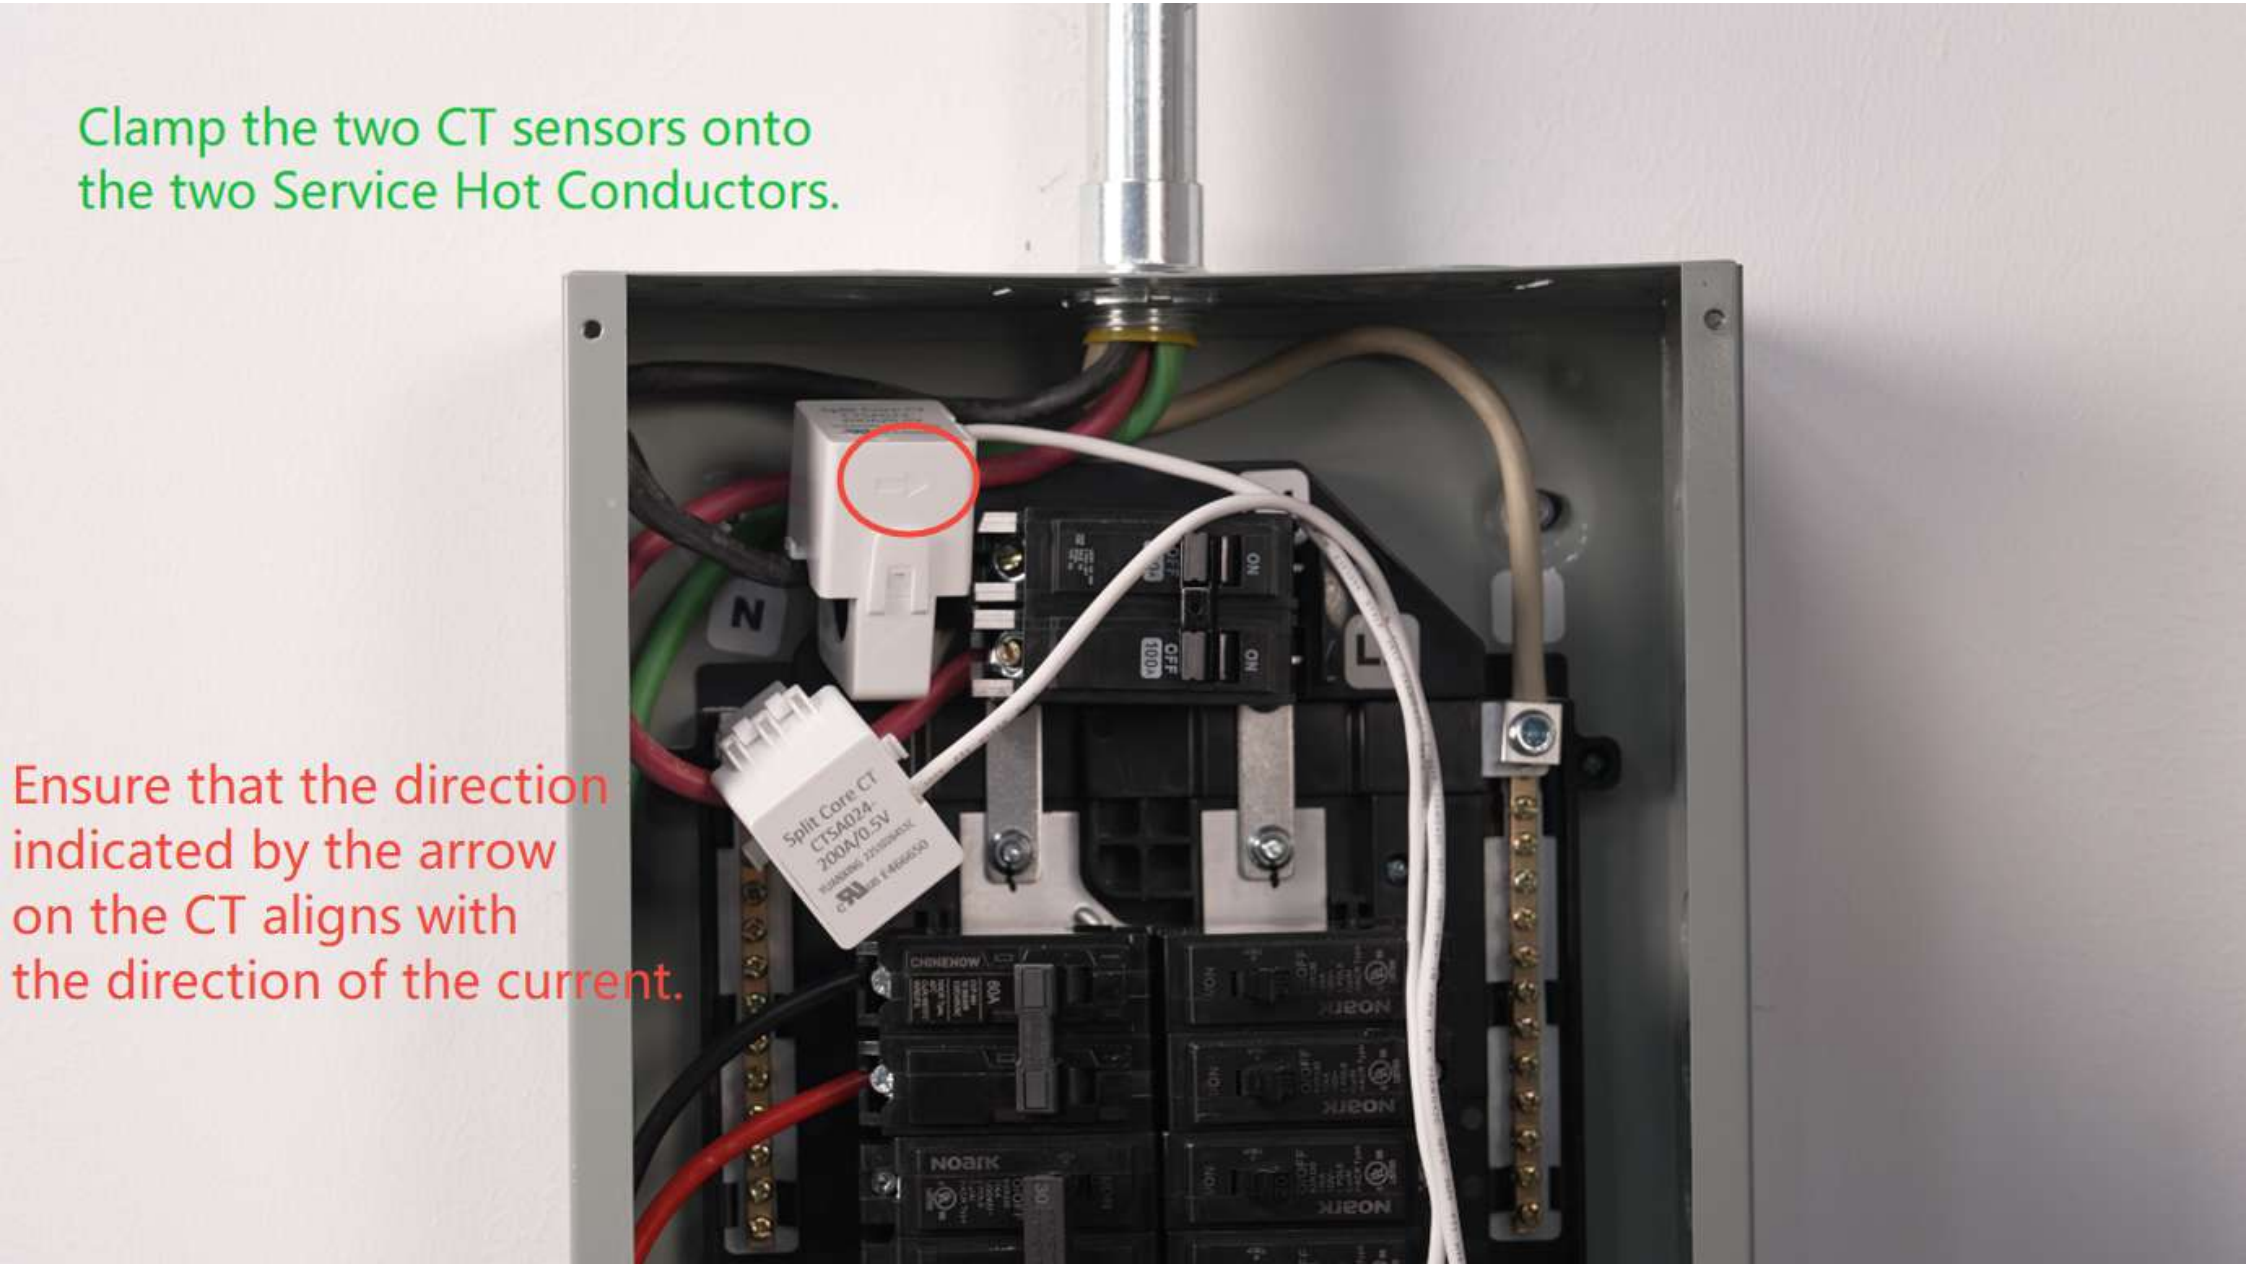


SAFETY WARNING


Disconnect power before performing any work inside the electrical panel.


Clamp the two CT sensors onto
the two Service Hot Conductors.
Ensure that the direction
indicated by the arrow
on the CT aligns with
the direction of the current.
Split Core CT
CTSA024-
200A/0.5V
N
L
ON
OFF
100A
CHENGNOW
NOARK


Route the CT cable through the cable entry point located on the bottom right side of the charging station.

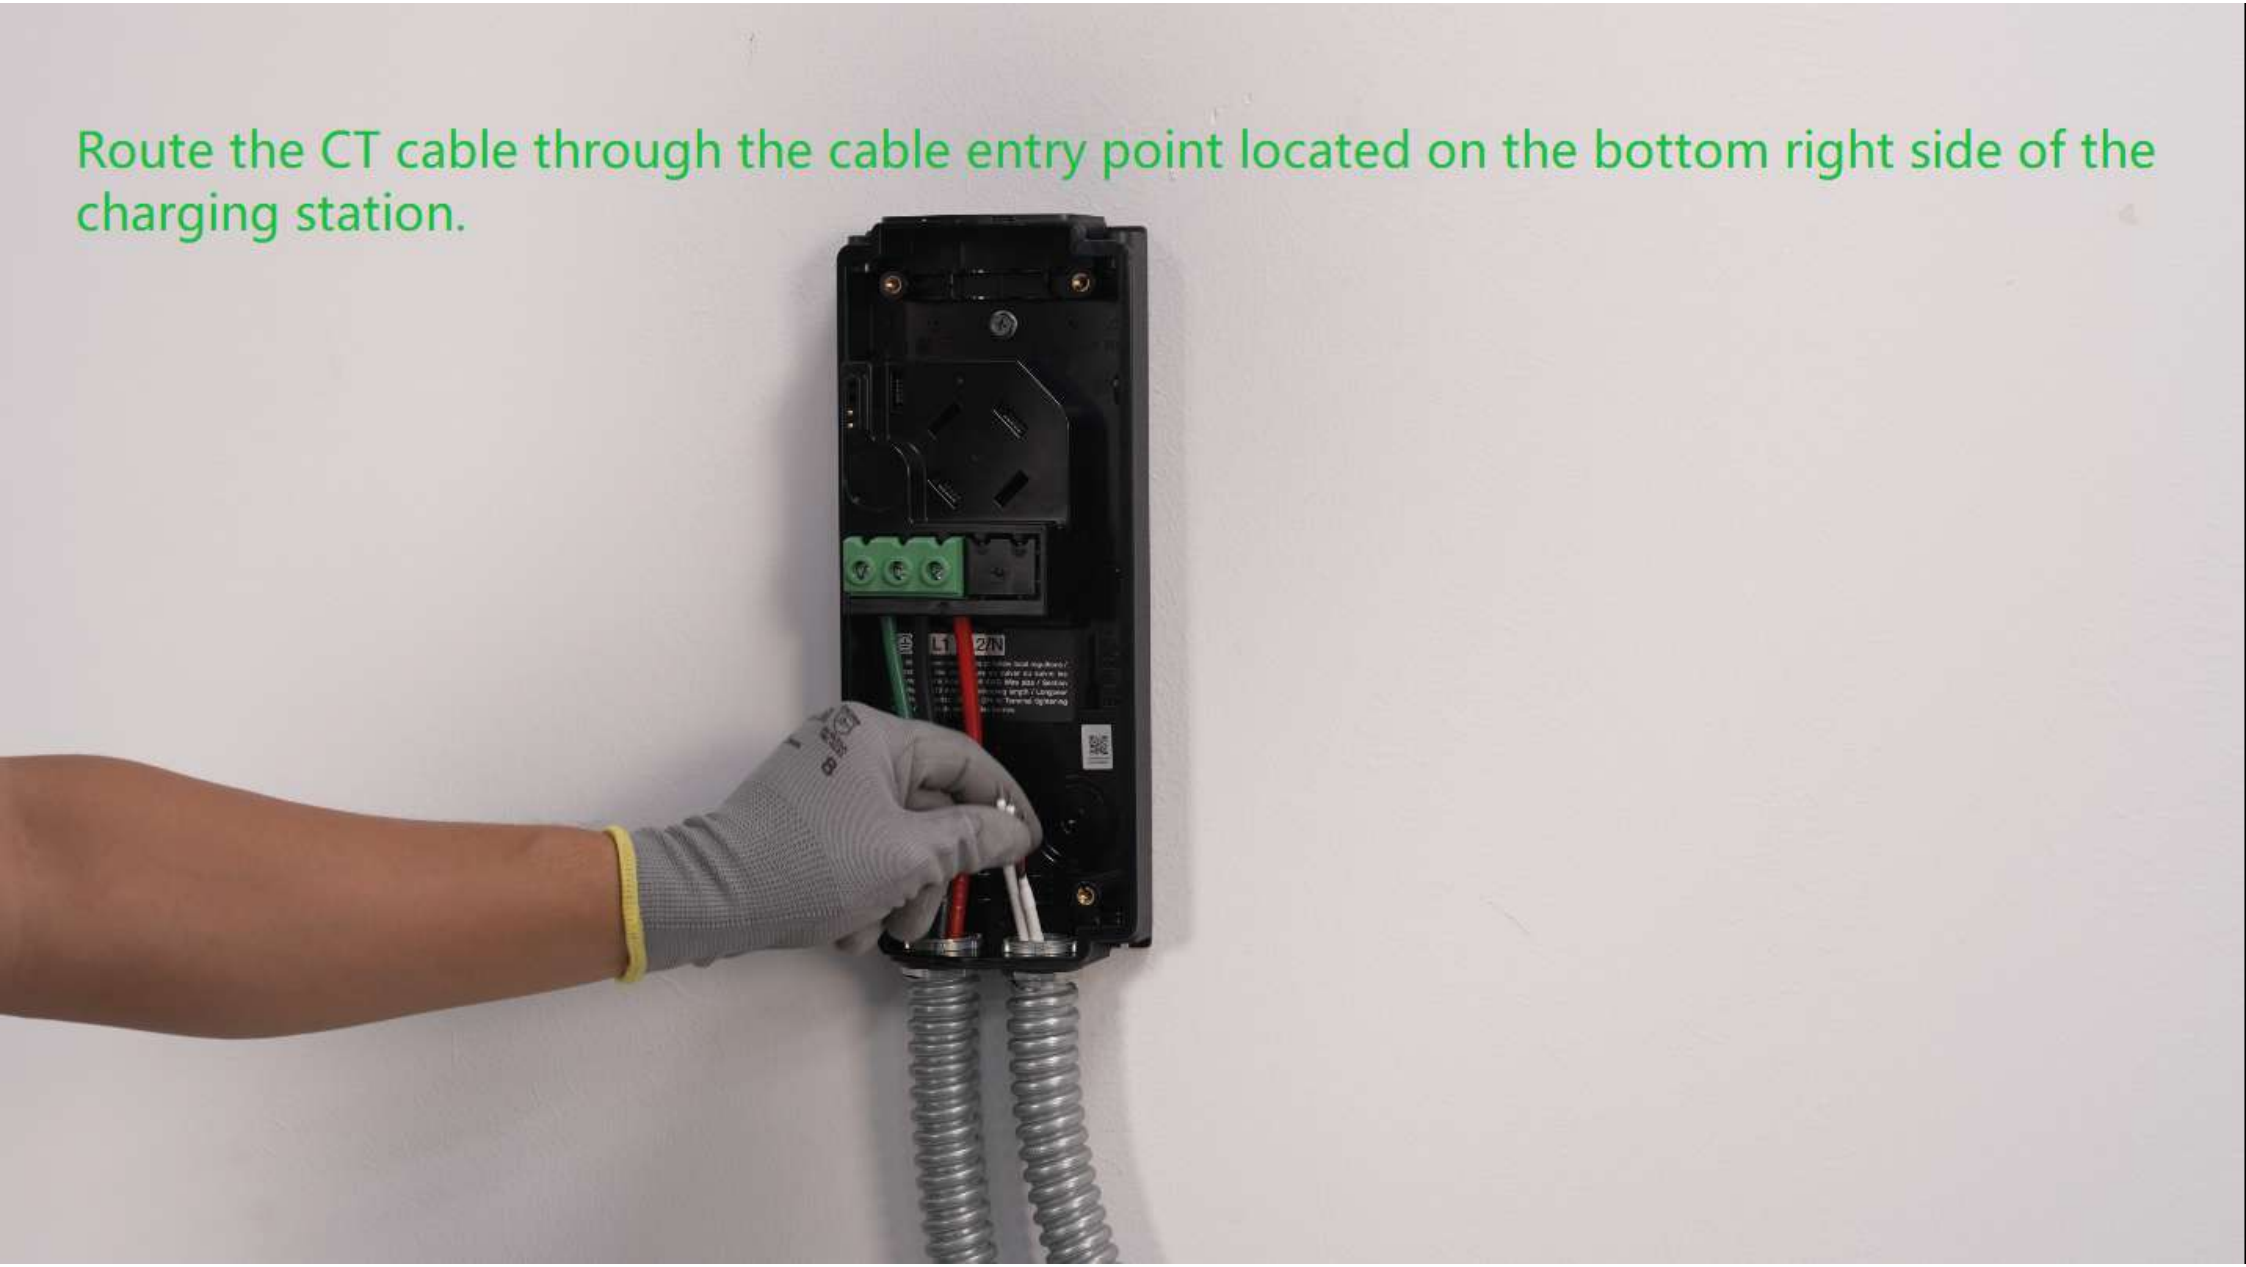

If you need to extend the CT cable, you can purchase an Ethernet cable and use the two pairs of green connectors provided to make the connection. (The cable can be extended up to a maximum of 30 meters.)

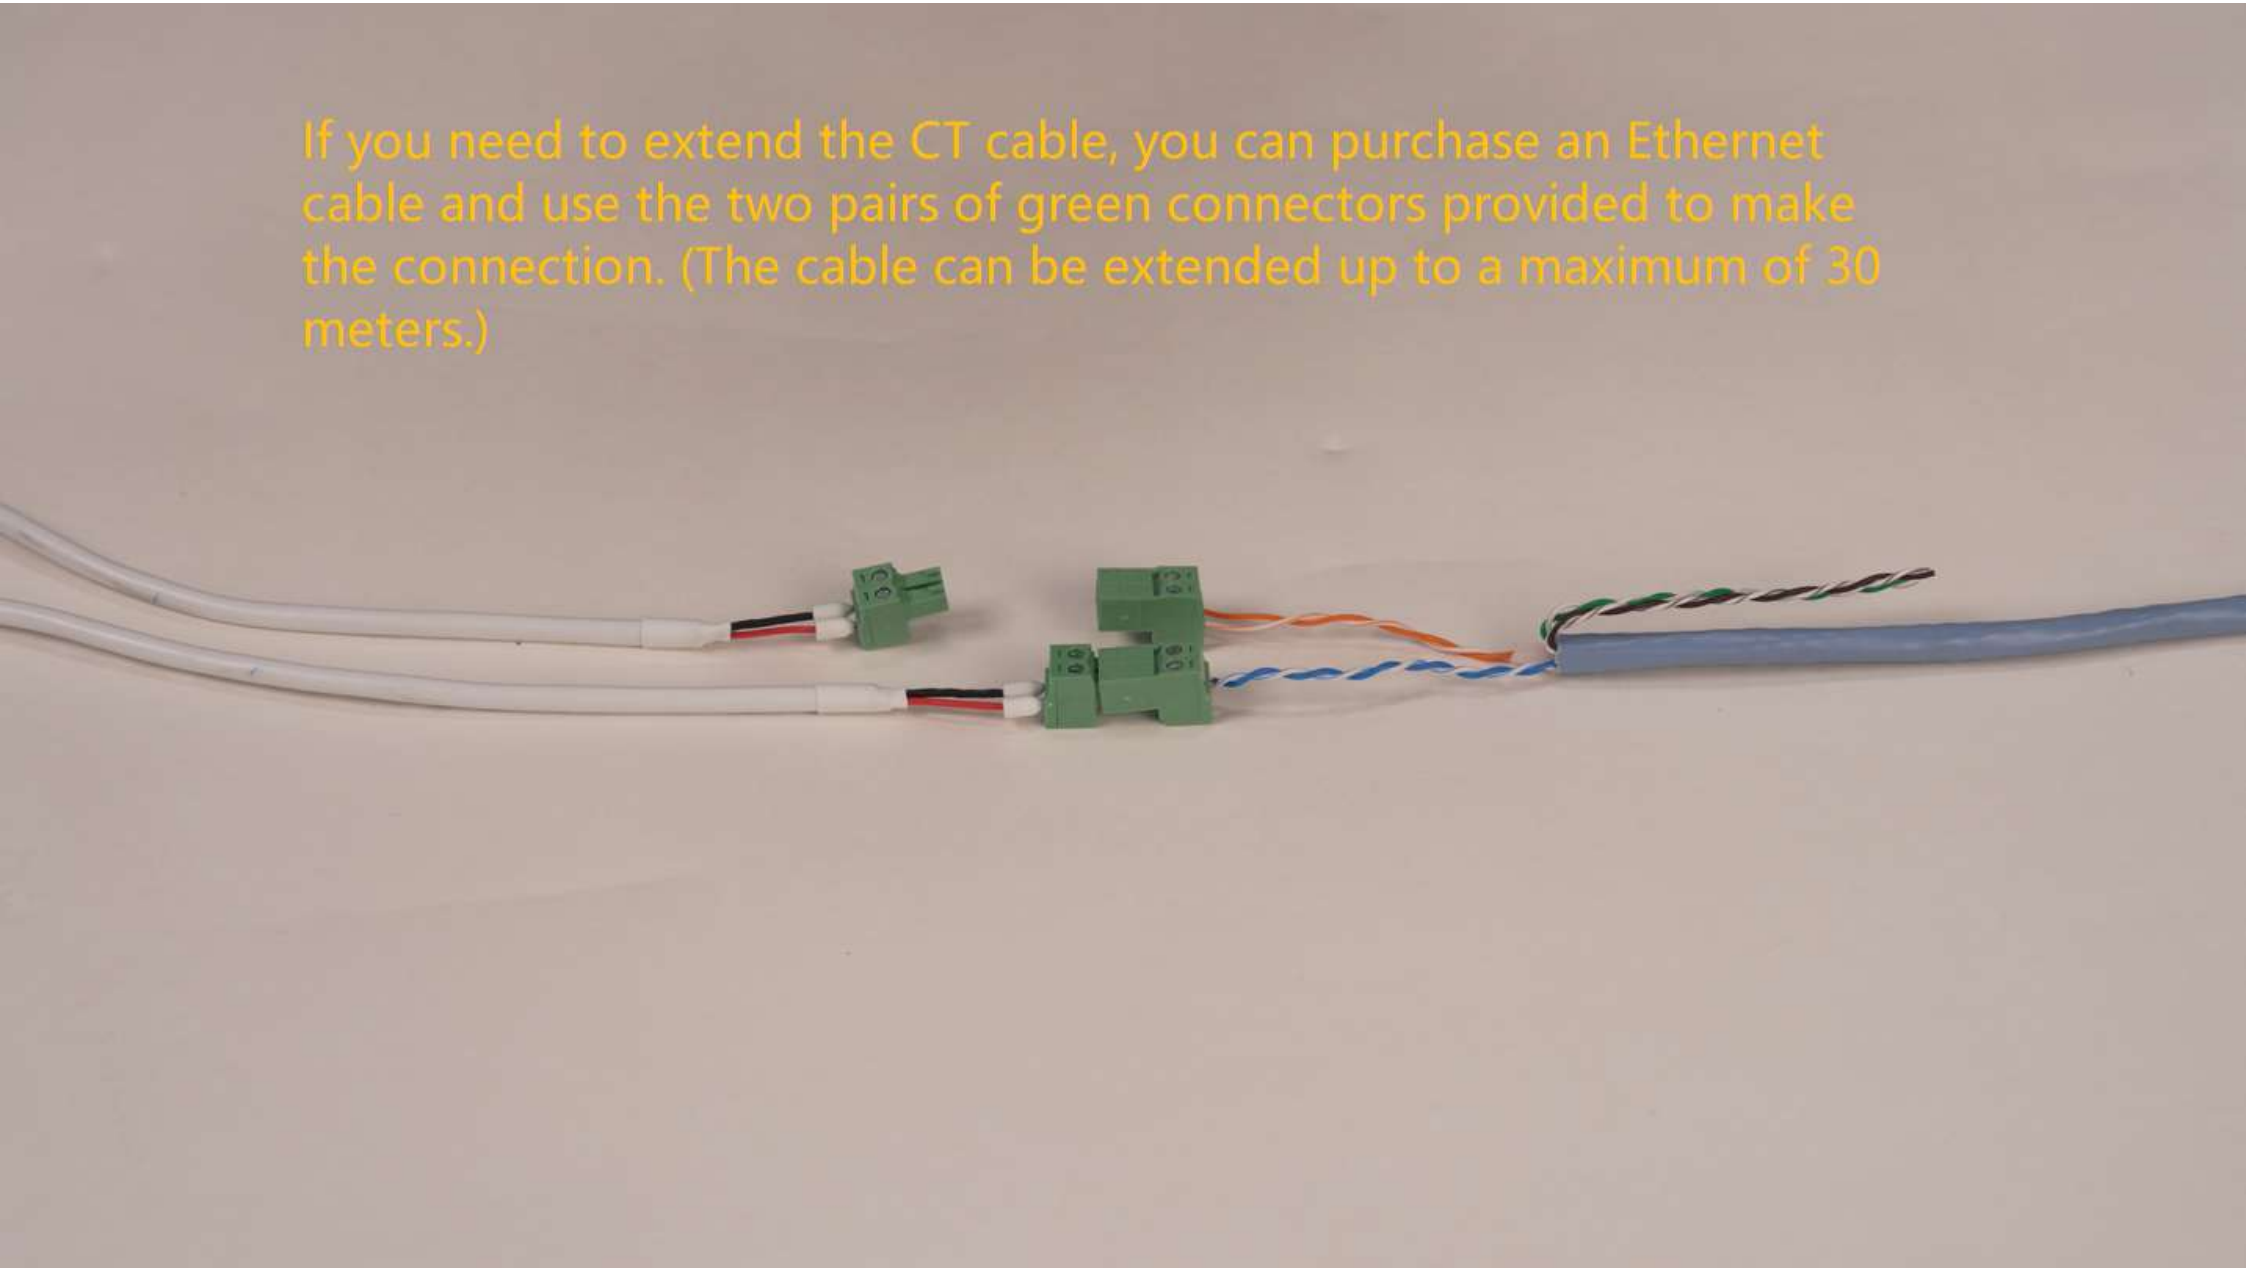

Insert the CT cable connectors into the corresponding CT1 and CT2 ports on the charging station.

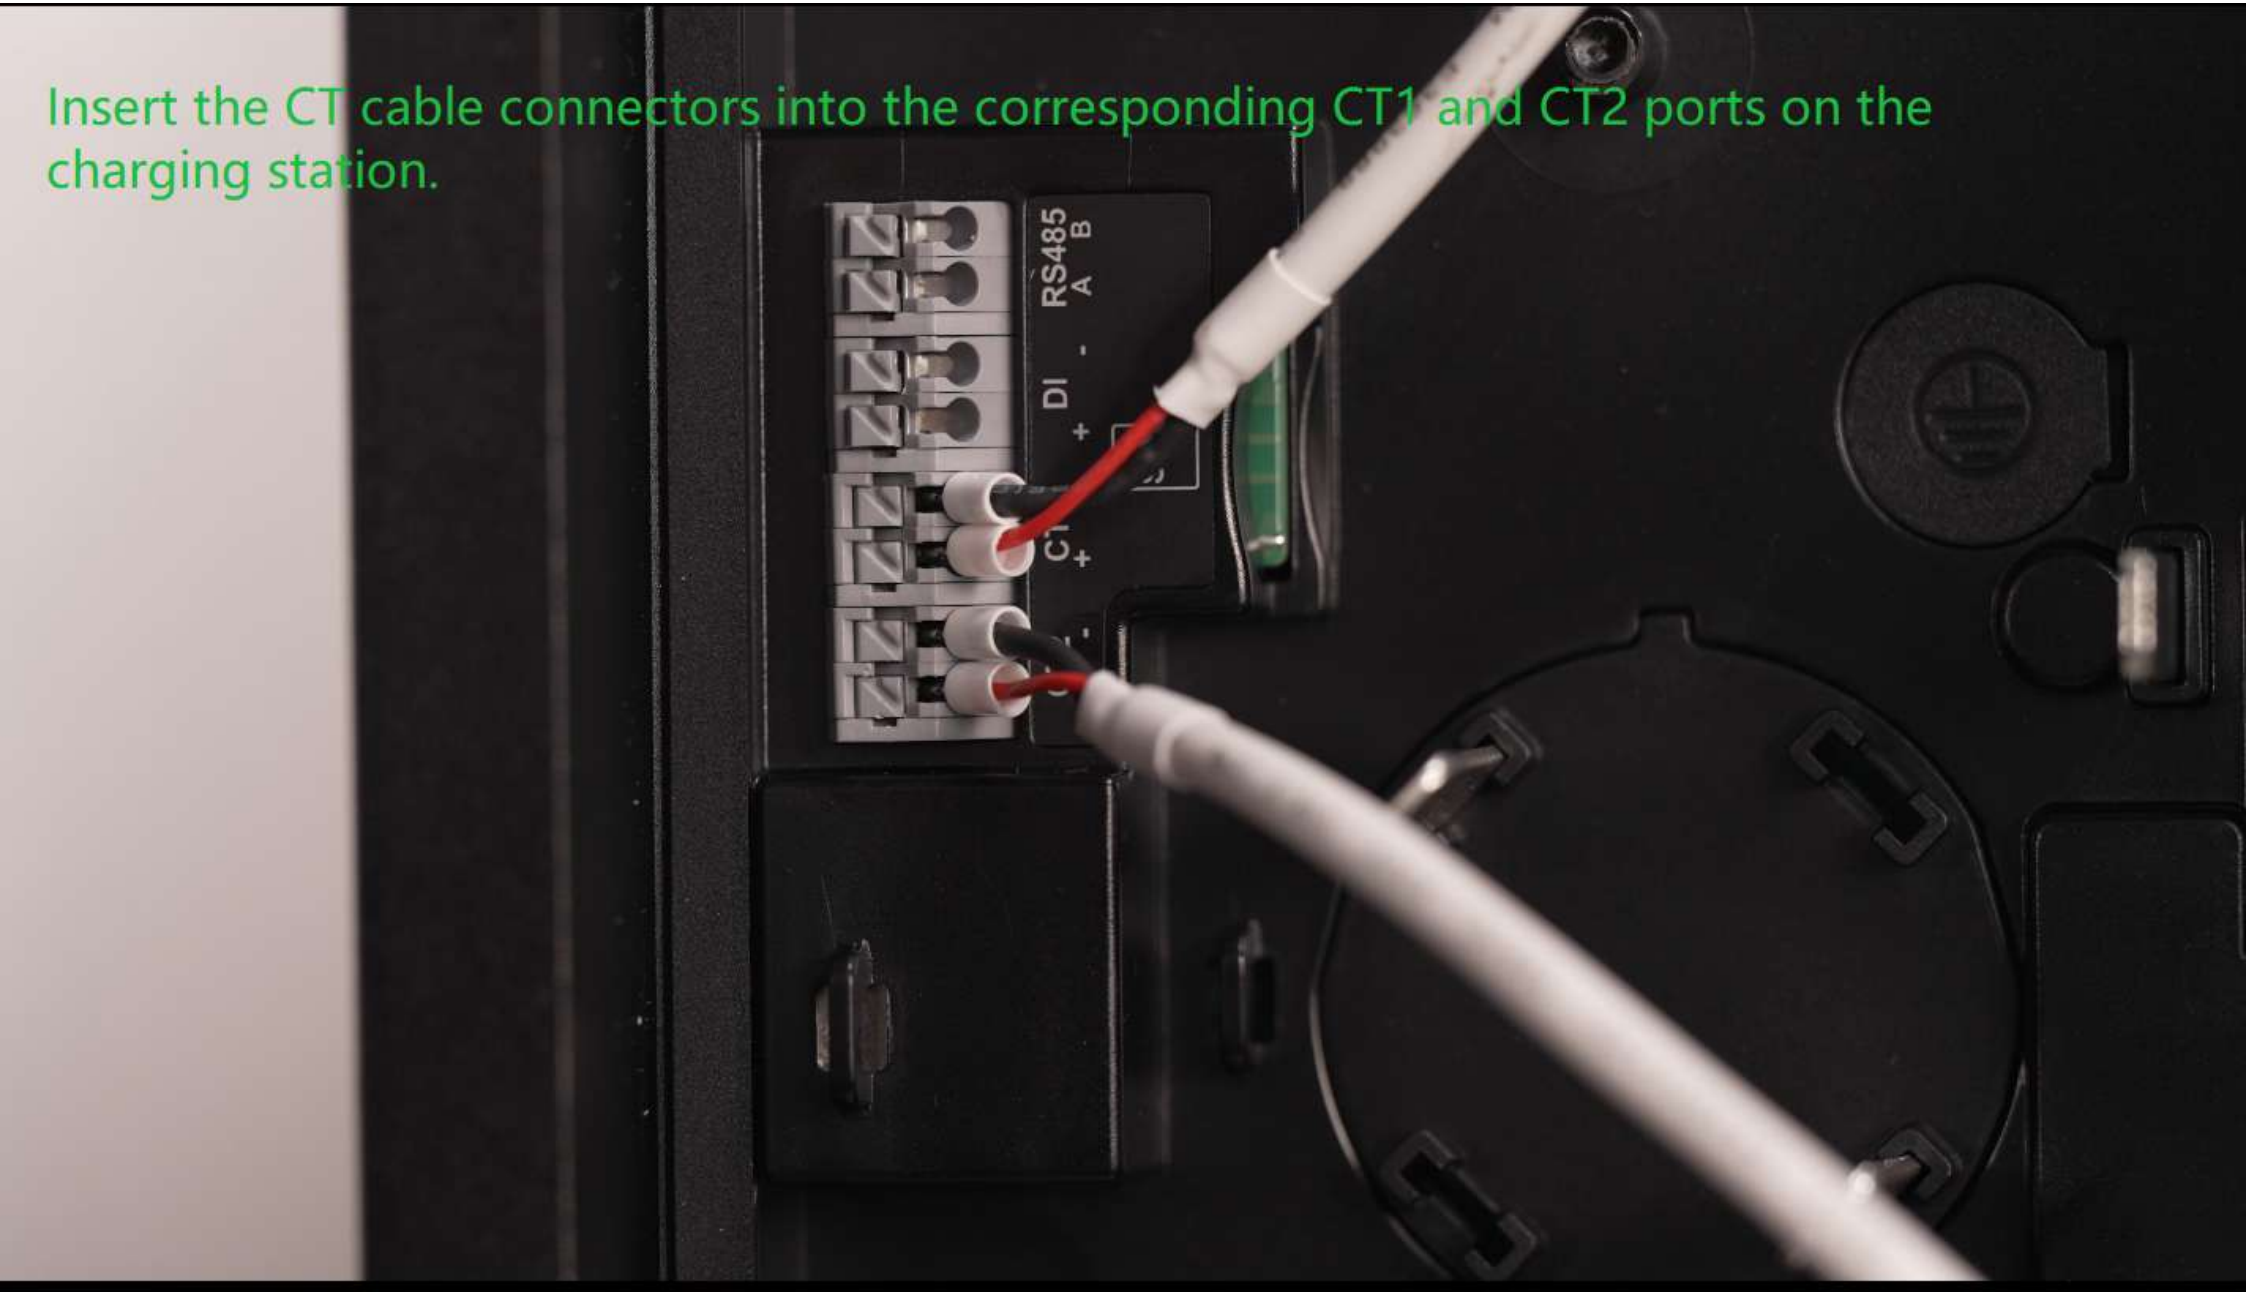

Secure the CT wire to the charging station using cable ties.

